

# AC 226

## Self Contained Ice Machine 145 kg

Item #:
Project:
Quantity:



### FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized control.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.



AC L 226  
Large Gourmet 39 g  
Ø 38 x H 41 mm



AC M 226  
Medium Gourmet 20 g  
Ø 30 x H 34 mm



AC S 226  
Small Gourmet 8 g  
Ø 21 x H 25 mm

### CONDENSING SYSTEM

Air cooled  
Water cooled

### REFRIGERANT GAS

R404A  
R452A

### VOLTAGE V/Hz/ph

230/50/1  
230/60/1

### INTERNAL BIN CAPACITY

70 kg

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	10

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**  
Apple store  
Google play  
Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Self Contained Ice Machine 145 kg

# AC 226

## Self Contained Ice Machine 145 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 145 kg

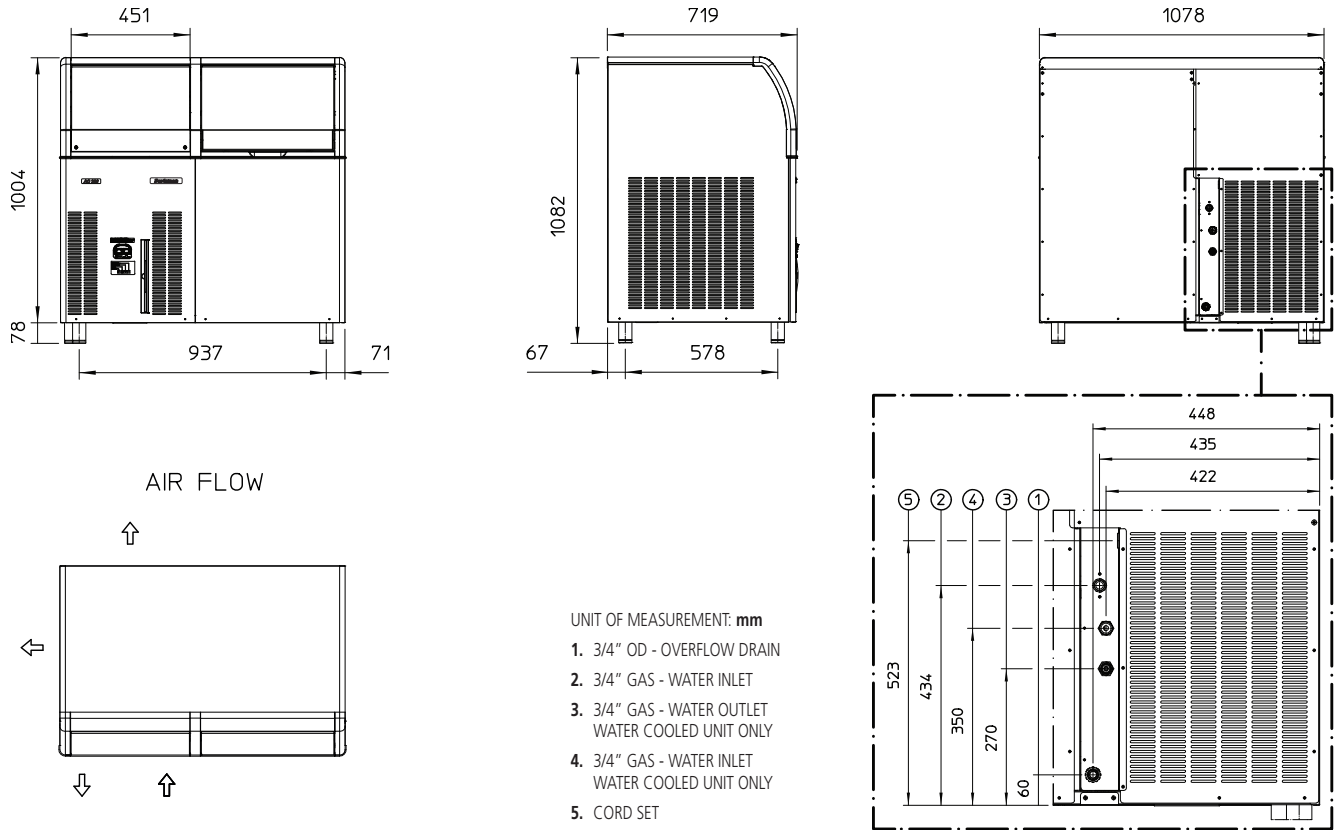

UNIT DATA		SHIPPING DATA	
Size (W x D x H)	1078 x 719 x 1082 mm	Carton (W x D x H)	1150 x 780 x 1160 mm
Net weight	96 kg	Weight	110 kg

All data refer to R404A refrigerant models

Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*) l/h	Instant power W	Compressor W	Circuit wires No. x Ømm²	Max. fuse size A
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h					
AC L 226 AS	230/50/1	134	128	101	23.6	23.7	11.3	1150	2650	3 x 1.5	16
AC M 226 AS	230/50/1	145	142	110	22.0	24.2	13.8	1150	2650	3 x 1.5	16
AC S 226 AS	230/50/1	145	140	110	22.5	24.7	16.7	1150	2650	3 x 1.5	16
AC L 226 WS	230/50/1	150	130	100	15.0	19.5	141.7	800	2650	3 x 1.5	16
AC M 226 WS	230/50/1	150	147	130	14.8	19.2	139.2	800	2650	3 x 1.5	16
AC S 226 WS	230/50/1	145	140	110	22.5	24.7	139.2	1300	2650	3 x 1.5	16
AC L 226 AS	230/60/1	147	143	114	23.3	26.4	13.1	1150	3100	3 x 1.5	16
AC M 226 AS	230/60/1	145	142	110	25.6	28.1	15.8	1150	3100	3 x 1.5	16
AC L 226 WS	230/60/1	147	143	114	23.3	26.4	141.7	1150	2650	3 x 1.5	16
AC M 226 WS	230/60/1	145	142	110	25.6	28.1	139.2	1150	3100	3 x 1.5	16

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions