

MV 306

Modular Ice Machine up to 154 kg

Item #:
Project:
Quantity:



FEATURES

- "Global Standard" 56 cm (22") slim-size width fits in most locations.
- Auto-Alert indicator lights- communicate about operating status: a diagnostic LED light guides the troubleshooting process and helps decisions regarding opening a service call.
- Front-facing Evaporator - Ice forming process inspection and routine cleaning operations may be accomplished simply removing the front panel.
- Hand-removable water distribution tube- routine cleaning has never been so easy!
- Embedded antimicrobial- Ag-Ion® antimicrobial is present in selected food-zone components
- External Components- All external panel components are crafted for optimal aesthetic appeal through superior fit and finish.
- Reusable air filter is easily removable from the outside for ease of cleaning (in air-cooled models).



MV L 306
Large Cube 17 g
W 29 x D 24 x H 29 mm



MV 306
Dice Cube 10 g
W 22 x D 24 x H 22 mm



MV HL 306
Half Large Cube 6 g
W 10 x D 24 x H 29 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

RECOMMENDED BINS

Head	Bins		kg
	MV 306	✓	
	✓	SB322	168
	CBT30EMCD	SB393	181
	CBT30EMCD	SB530	243

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxx : need additional bin top

Certifications:



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
 Apple store
 Google play
 Windows store



www.scotsman-ice.it
www.scotsman-ice.com


Modular Ice Machine up to 154 kg

MV 306

Modular Ice Machine up to 154 kg

Item #:
Project:
Quantity:

Modular Ice Machine up to 154 kg

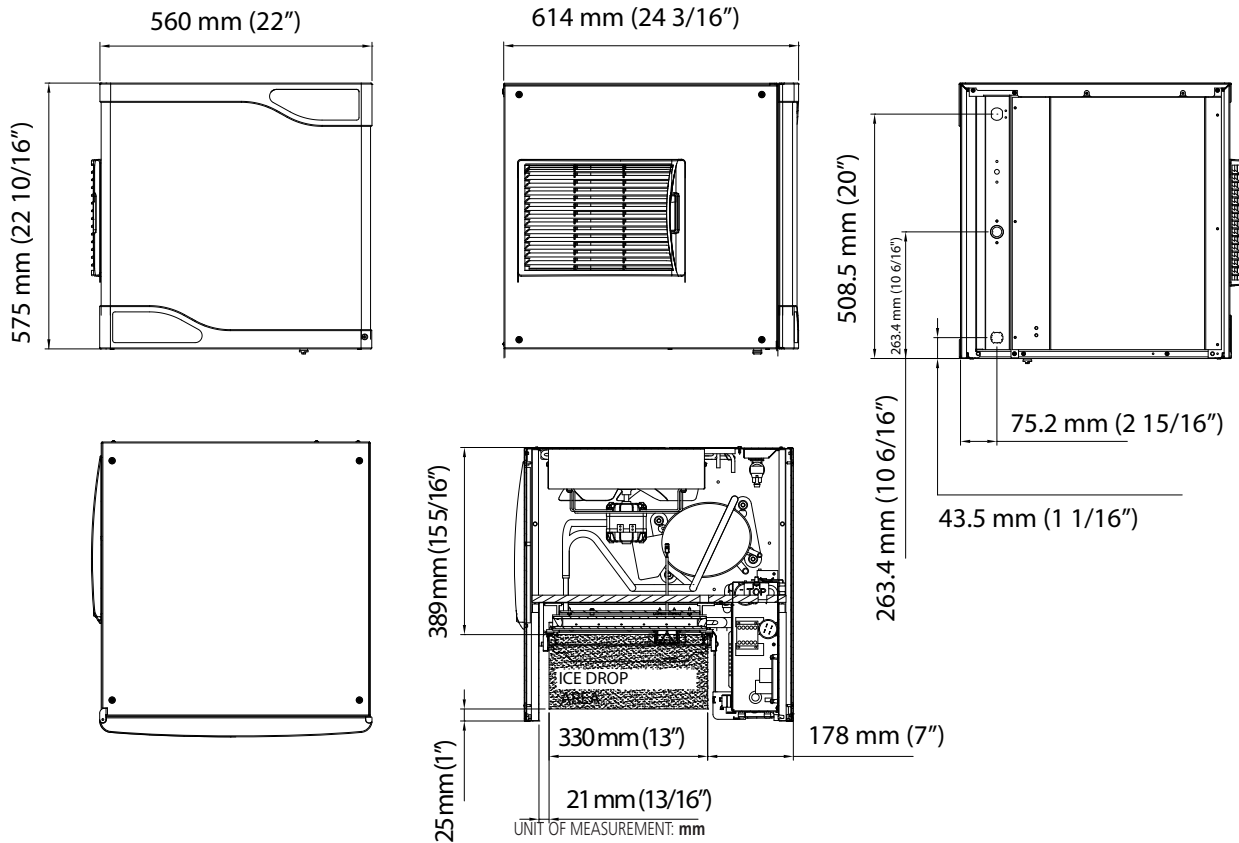

UNIT DATA	Compressor				Circuit wires		Max. fuse size
	Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	560 x 620 x 575 mm						
Net weight	63 kg						
SHIPPING DATA	Carton (W x D x H)	630 x 760 x 690 mm					
	Weight	67 kg					
	MV 306 AS	230/50/1	5453	1598	1		10
	MV 306 WS	230/50/1	5453	1598	1		10
	MV HL 306 AS	230/50/1	18497	5421	1		10
	MV HL 306 WS	230/50/1	18497	5421	1		10
	MV L 306 AS	230/50/1	18497	5421	1		10
	MV L 306 WS	230/50/1	18497	5421	1		10
	MV 306 AS	230/60/1	5453	1598	1		10
	MV 306 WS	230/60/1	5453	1598	1		10
MV HL 306 AS	230/60/1	18497	5421	1		10	
MV HL 306 WS	230/60/1	18497	5421	1		10	

Version	Condensation	Voltage	24 h ice production kg			Energy consumption*		Water usage*	Instant power
			10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h		
MV 306 AS	Air	230/50/1	154	138	107	15.9	9.5	7.0	850
MV 306 WS	Water	230/50/1	136	128	110	12.1	7.3	107.0	750
MV HL 306 AS	Air	230/50/1	154	138	107	15.9	9.5	7.0	850
MV HL 306 WS	Water	230/50/1	136	128	110	12.1	7.3	107.0	750
MV L 306 AS	Air	230/50/1	154	138	107	15.9	9.5	7.0	850
MV L 306 WS	Water	230/50/1	136	128	110	12.1	7.3	107.0	750
MV 306 AS	Air	230/60/1	154	138	107	15.9	9.5	7.0	780
MV 306 WS	Water	230/60/1	136	128	110	15.9	9.5	107.0	640
MV HL 306 AS	Air	230/60/1	154	138	107	15.9	10.0	7.0	780
MV HL 306 WS	Water	230/60/1	136	128	110	15.9	9.5	107.0	640

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions